

## PRODUCT INFORMATION

Tension: cc 3V/6V/12V

Matière: Métal


Modèle: N20

Vitesse de rotation: 15/30/50/60/100/200/300/500/1000RPM

Longueur totale: 36mm

Taille du moteur: 12mm (diamètre) \* 26mm (hauteur)

Taille de l'arbre: 3mm (diamètre) \* 10mm (longueur)

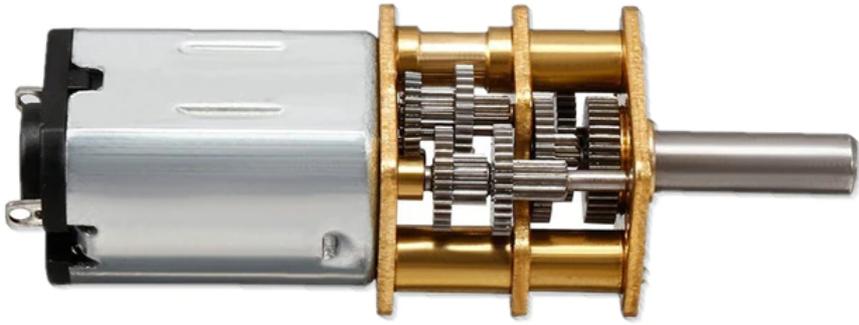


DC 3V



DC 6V



DC 12V

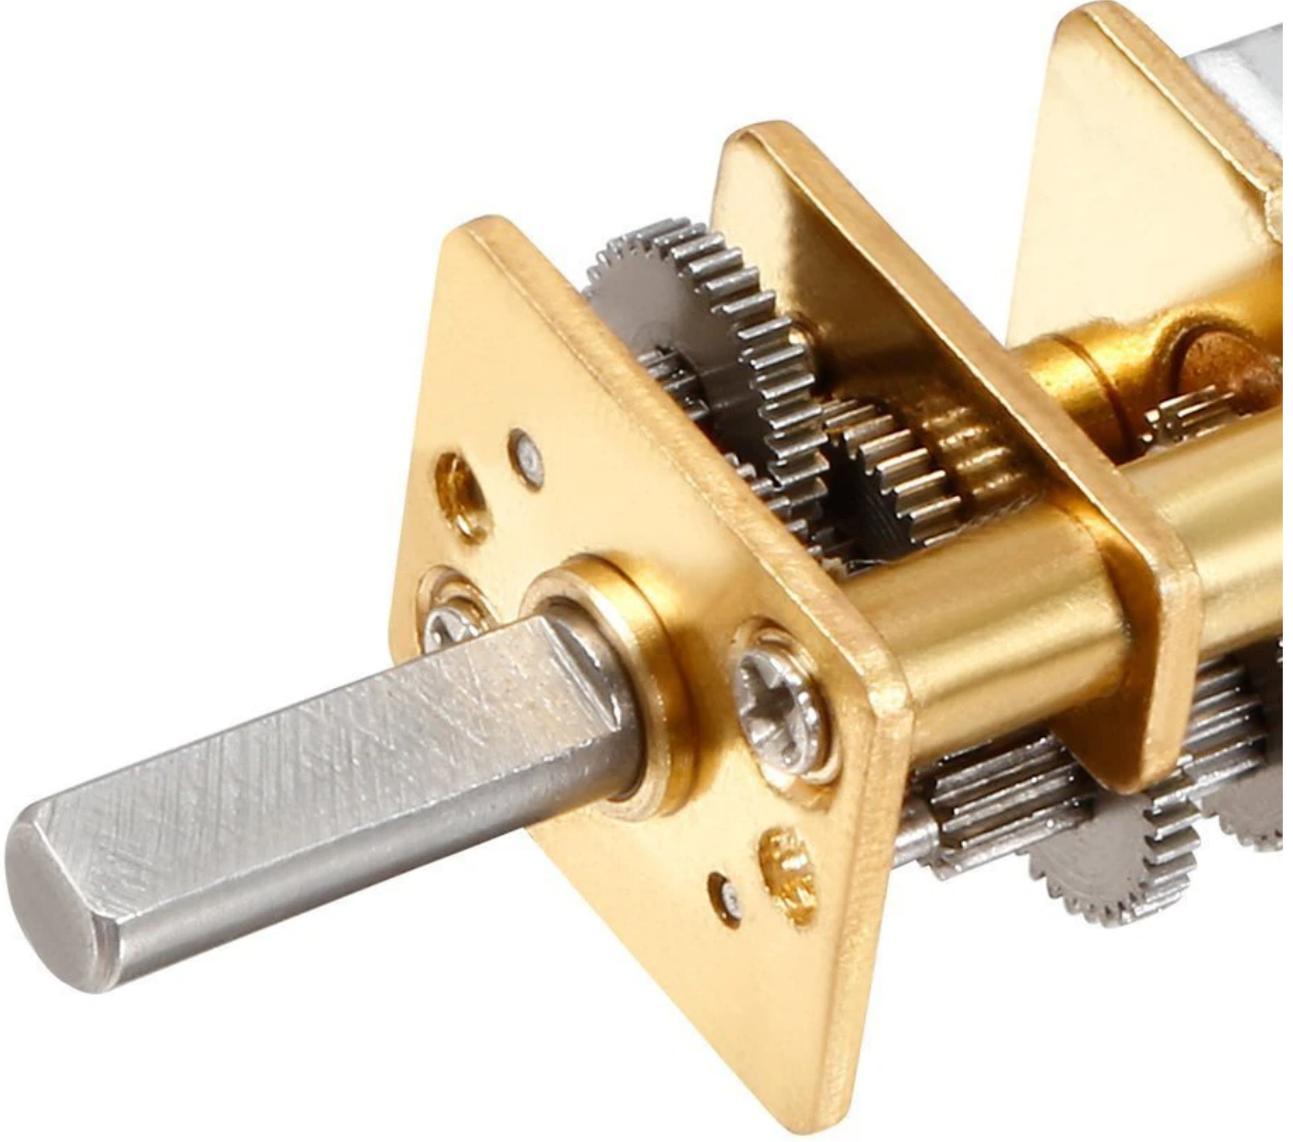



<b>Voltage DCV</b>	<b>No-load speed rpm\min</b>	<b>Load speed rpm\min</b>	<b>Rated torque kg\cm</b>	<b>Rated current MA</b>	<b>Stall torque kg\cm</b>	<b>Stall current MA</b>	<b>Reduction ratio 1:00</b>
3	250	200	0.07	80	0.56	100	30
3	150	100	0.10	80	0.80	100	50
3	75	60	0.15	80	1.20	100	100
3	50	40	0.20	60	1.60	100	150
3	37	30	0.25	60	2.00	100	200
3	30	24	0.30	60	2.40	100	250
3	25	20	0.50	60	4.00	100	298
6	500	400	0.15	160	1.20	100	30
6	300	240	0.20	160	1.60	100	50
6	150	120	0.30	160	2.40	100	100
6	100	80	0.40	160	3.20	200	150
6	74	70	0.60	120	3.20	200	200
6	60	48	1.00	120	7.00	200	250
6	50	40	1.50	120	10.00	200	298
12	1000	800	0.30	300	2.40	300	30
12	600	480	0.40	300	3.20	300	50
12	300	240	0.50	300	4.00	300	100
12	200	160	1.00	300	7.00	300	150
12	148	118	1.20	300	9.00	300	200
12	120	96	2.00	300	16.00	300	250
12	100	80	2.00	300	16.00	300	298